


VICON


Vicon Industries Inc.
 Corporate Headquarters
 89 Arkay Drive
 Hauppauge, NY 11788
 631-952-CCTV (2288)
 Fax 631-951-CCTV
 Toll Free 1-800-645-9116
 Tech Support 1-800-34-VICON
 www.vicon-cctv.com

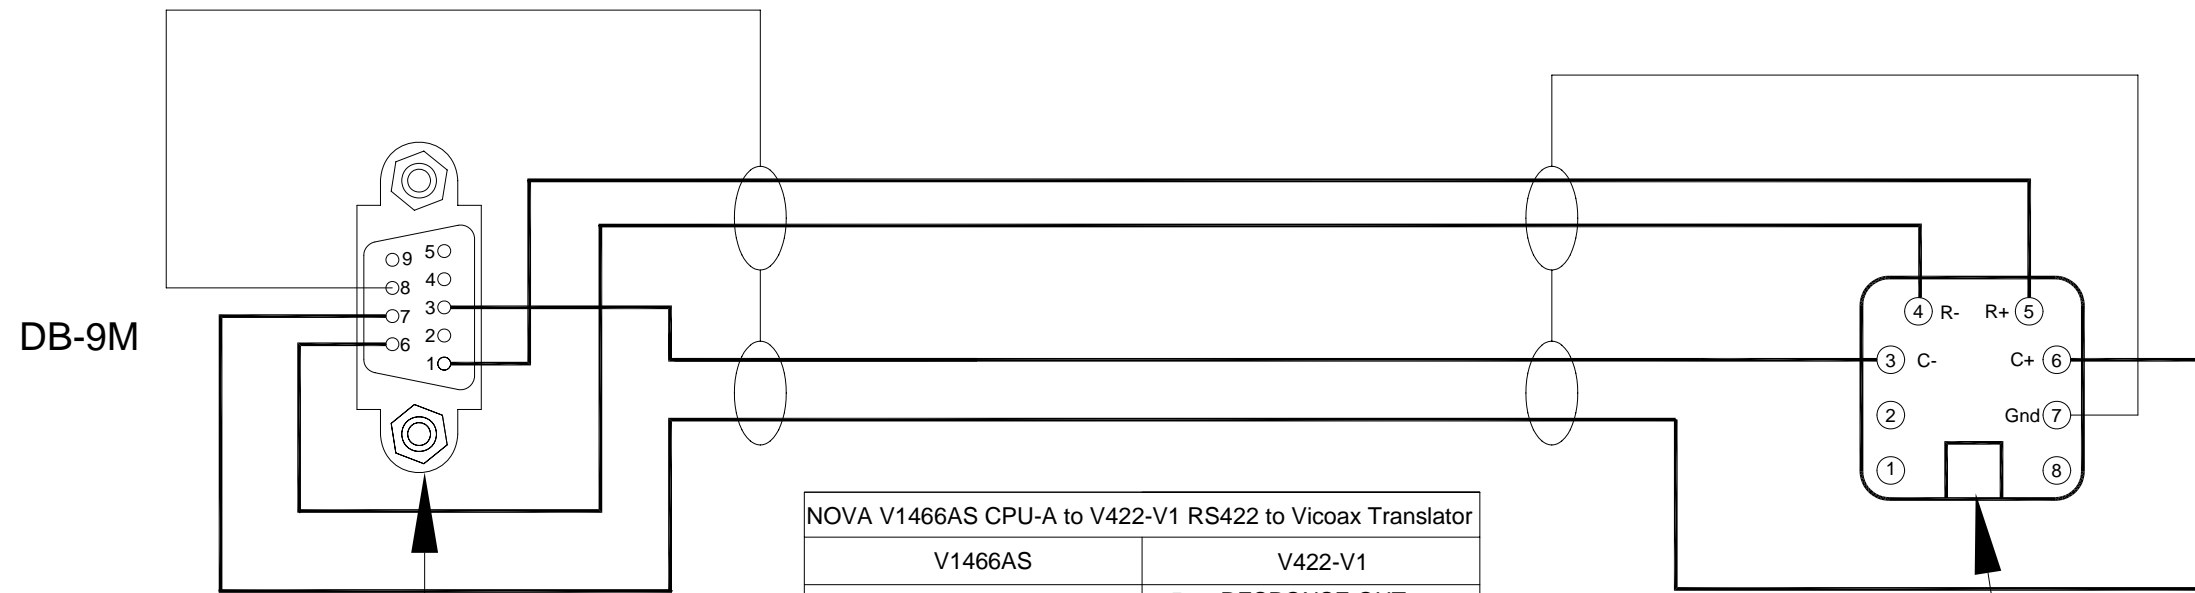


NOVA V1466AS CPU-A to V422-V1 RS422 to Vicoax Translator		
	V1466AS	V422-V1
J4-1	RESPONSE IN +	5 RESPONSE OUT +
J4-3	COMMAND OUT-	3 COMMAND IN -
J4-6	RESPONSE IN -	4 RESPONSE OUT -
J4-7	COMMAND OUT+	6 COMMAND IN+
J4-8	GROUND	7 GROUND*
J4-2	GROUND	7 GROUND*
J4-4	N/C	1 N/C
J4-5	N/C	2 N/C
J4-9	N/C	8 N/C

*Connect either pin J4-2 or J4-8 on V1466AS to ground pin 7 on V422-V1

RJ45 Termination Box
 supplied with
 V422-V1

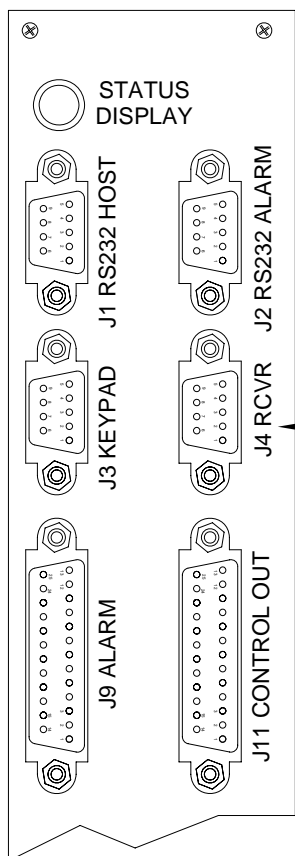

Connects to
 V1466 Matrix, J4
 (Receivers)

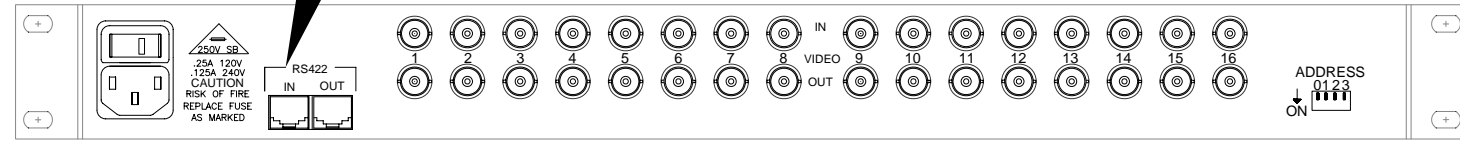

V422-V1 RS-422 TO VICOAX TRANSLATOR - REAR PANEL

NOVA V1466A & CPU - A Card - REAR PANEL

- Notes:
1. Connectors are shown from wiring side.
 2. Wire is Belden 8723 or its electrical equivalent.
 3. Insure wires are paired as shown in drawing.

This drawing and the contents herein are Copyright 2002 Vicon Industries Incorporated. They are furnished on a confidential basis for the specified purpose as indicated on the drawing itself. Permission is granted to use and copy this drawing freely provided that (a) the intended usage is the connection and operation of Vicon equipment, and (b) any copies contain this notice in its' entirety. Vicon makes no representations as to the operability of any described systems or interconnections unless this drawing is specifically marked for Construction.

REVISIONS	
SCALE:	NTS
DATED:	1/26/07
DRAWN:	JMH
CHECKED:	C: A:
PROJECT:	Interconnects - Typical
TITLE:	Connector Pinouts: V1466, J4 To V422-V1
NUMBER:	1400-4000-01
Rev.	-00